


Pull-Down Kitchen Faucet

- *F529-7SLC Finish(C)
- *F529-7SLMC Finish(MC)
- F529-7SLS Finish(S)
- *International Only

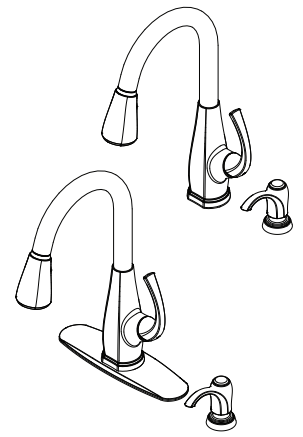

- AccuDock Spray Head Docking
- TiteSeal™ Deck Plate
- 1, 2, 3, or 4-Hole Installation
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- 1.5 GPM Flow Rate with Insert 941-055
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- 60" Nylon Hose
- AccuDock Spray Head Docking
- Concealed Screw
- 360° Rotating Spout
- Flex-Line Supply Lines
- High Arc Spout
- Mounting Hardware Included
- PVD Finish
- EZ Clean™
- TiteSeal™ Deck Plate
- Soap Dispenser Included
- Quick Install Tool
- Pfast Connect
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

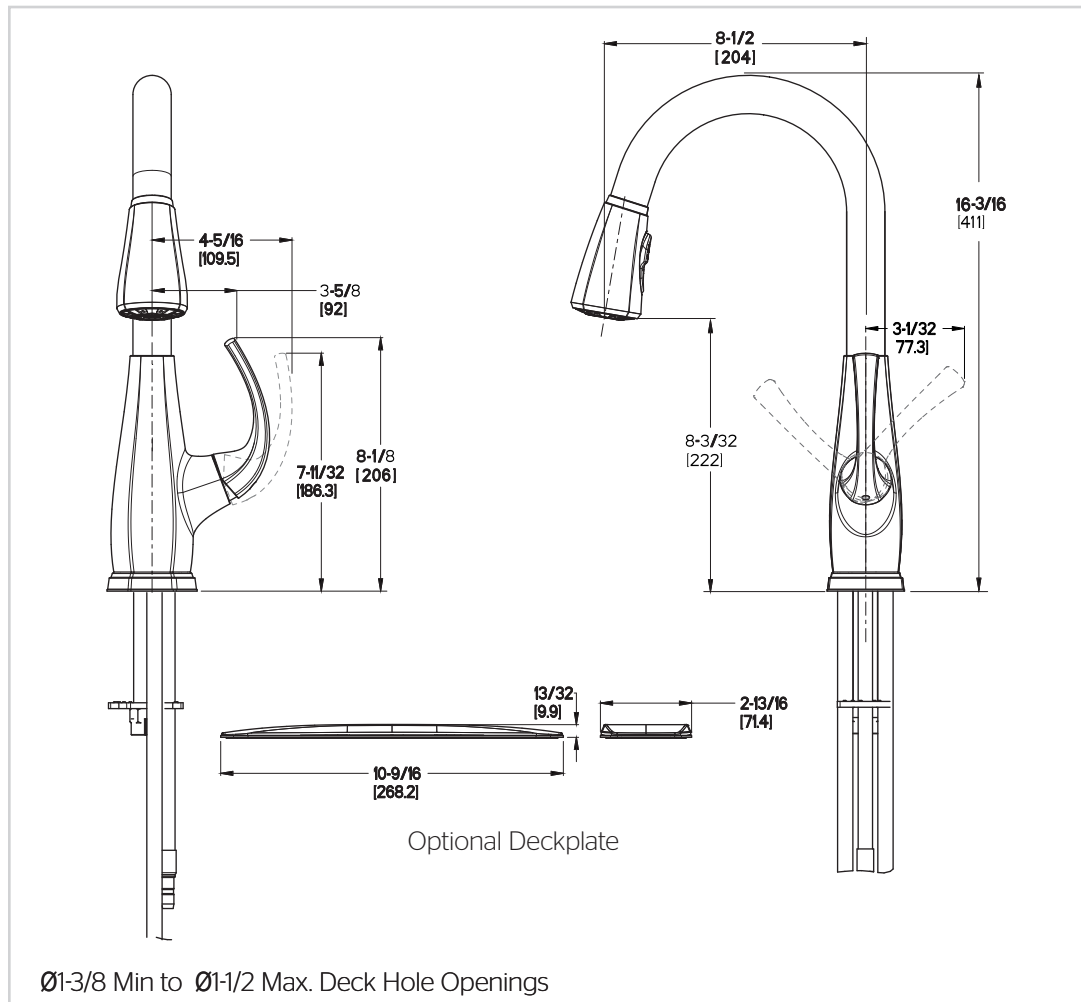

Top Filling Soap Dispenser

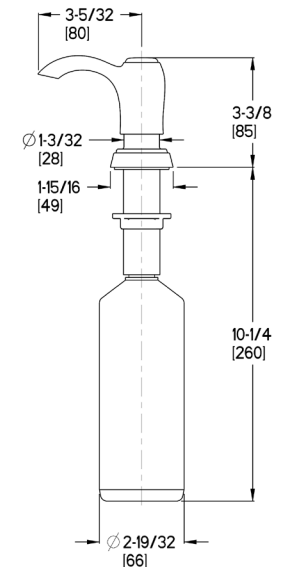

36 Inch Supply Lines with 3/8 Female Compression Brass Connections

